

Operation Instructions

Make your choice...


M-209 Push Switch For Disabled



1 Safety Instruction

! Thank you for your purchasing, please read this manual carefully before use it.

2 Product Overview

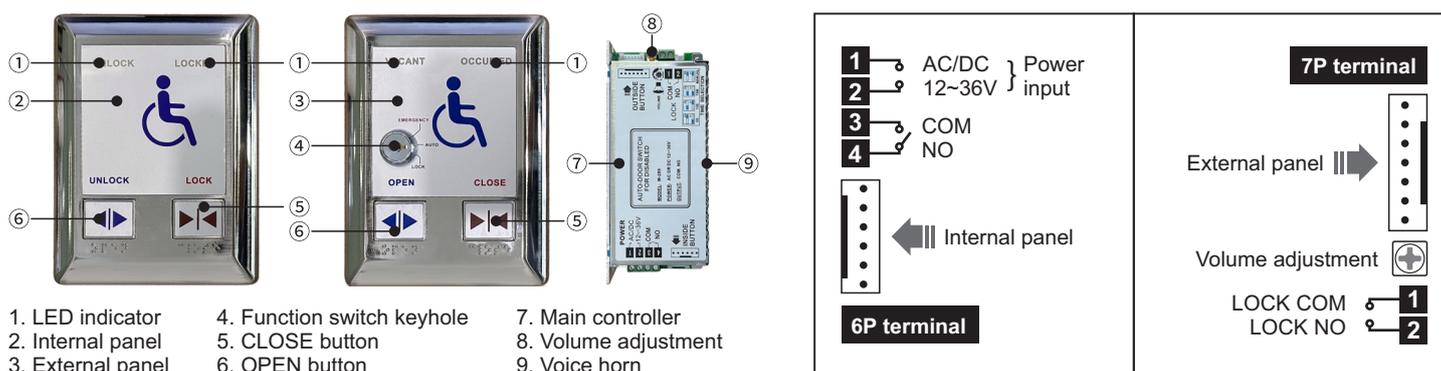

3 Function Introduction

	EMERGENCY	Two panels are invalid, when in the emergent environment, users can start EMERGENCY door opening forcibly function.	Door open holding time adjustment								
	AUTO	Two panels in the normal work state, the system in the automatic operation state.					ON				
	LOCK	The button of two panels are invalid, the system is locked, door in the close state, stop using.					TIME	5s	15s	15min	manual

4 Using Process

- In the standby state, the external panel "VACANT" indicator light is on, the internal panel "UNLOCK" indicator light is on.
- Press "OPEN" button of the external panel, automatic door will open. At the same time, there is a voice prompt "Door is opening".
- After entering the room, press the "CLOSE" button of the internal panel, door will automatically close and lock. At the same time, there will be a voice prompt "Door is closing", the "LOCKED" indicator of the internal panel is on. If no operations over 5 seconds, with a voice prompt "enter the room, please push lock button"
- The "OCCUPIED" indicator light of the external panel is on. At this time, if someone press the "OPEN" or "CLOSE" button on the external panel, will issue a "OCCUPIED" voice prompt and the door will not be opened.
- When the people inside need go out, press the "OPEN" button on the internal panel, the door will open automatically and there will be a voice prompt "Door is opening", the "UNLOCK" indicator of the internal and "VACANT" indicator of external panel are on.
- When people come out, the automatic door will be closed automatically according to the setting time of the dial switch or press the "CLOSE" button on the external panel, the automatic door will be closed immediately. At the same time, there will be a voice prompt "Door is closing", the system will return to the standby mode.

! NOTE: The maximum use time of this system is 30 minutes, when up to 25 minutes, there will have a voice prompt "please note that this system will be unlocked after 5 minutes". At this time, if you need to continue to use it, please press the CONFIRM button or the "CLOSE" button of the internal panel. Then use time will delay 30 minutes. Otherwise, if without any operation, door will be opened automatically after five minutes.

5 Technical Parameters

Working voltage:	AC/DC 12~36V
Working current:	standby 52mA, action 108mA (DC 12V)
Dimension:	160(L)x120(W)x15.5(H)mm(internal panels), 160(L)x120(W)x32(H)mm(external panels), 143(L)x60(W)x40(H)mm(controller)
Packing list:	internal panelx1, external panelx1, main controllerx1, hornx1, keysx2, 6P cablex1, 7P cablex1, screws bagx1