


# Operation Instruction

## M-210 Power for access

Make your choice.....



### 5 Wiring diagram

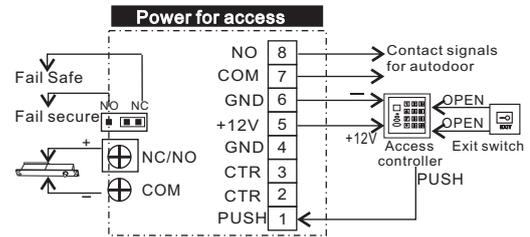


Make use of PUSH Signal to unlock electric lock and open autodoor

### 1 Safety Instruction

⚠ Thanks so much for purchasing this product, please read this instruction before using.

### 2 Product overview

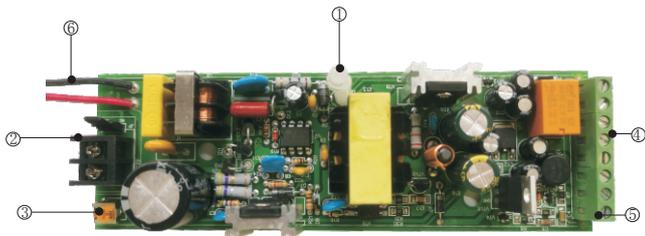

- ① Operation indicator
- ② Electric lock signal output
- ③ Timing control
- ④ The terminal of input and output
- ⑤ Screw hole
- ⑥ AC220V input

### 3 The overall characteristic

Adopt imported control component ,with high current output and voltage stabilization.

Featured with good heat-resistant quality, dapper appearance,stable performance& suitable for various occasions installation.

With one group of relay contact signal output, suitable to meet the needs of unlocking the electric lock and opening the autodoor . With time difference to achieve unlocking the electric lock first and hen open the autodoor.


With the input of active open signal and passive open signal to achieve opening the autodoor by different controls.

With delayed contact signal output, this product can be used as signal converter to connect with other controls.


Timing control to adjust opening time from 1-15S .

With operation indicator to confirm the validity of every actions.

### 4 The definition of input and output terminals

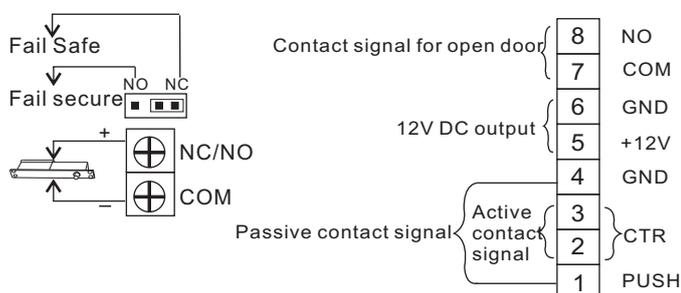


### Power for access

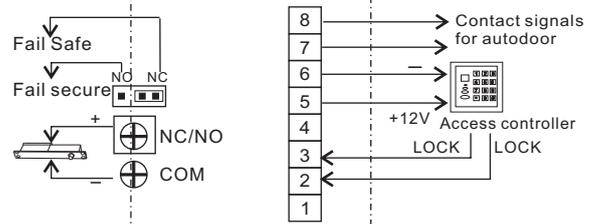

Make use of lock signal of access controller to unlock the electric lock and open autodoor

### Power for access

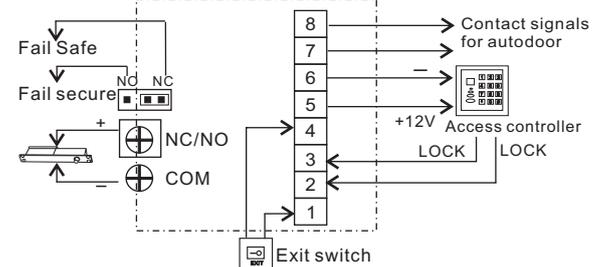

Make use of exit switch to unlock the electric lock and open autodoor

- 1 Indicator with red light when is power-on. Indicator with green light when door open.
- 2 Timing control:  
Rotate the timing control in a clockwise direction,door-open time will be long  
Rotate the timing control in a counterwise direction,door-open time will be short.

### 6 Specific considerations

- Three wires for AC INPUT, (fire wire, zero line and ground wire)
- Welding fuse is placed, the fuse should be changed timely in case overload with works.
- The electric lock is locked at normal time when no power is supplied. When active open signal of DC12V input, the electric lock unlocked.
- Demolishment and maintenance should not be carries by non-professions
- Since the released dates are guaranteed for one-year. Except for the human-factor destiny.

### 7 Technical parameter

Input voltage:	AC220v±5%
Output voltage:	DC12V
Output power:	≥5A
Open delayed ime:	1~15s
Time difference for unlock electric lock and open door:	0.5s
Weight:	265g
Appearance dimension:	176(L)x53(W)x37(H)mm